


# Specifications

Hydraulic Rough Terrain Crane


GENERAL INFORMATION ONLY

## HSP-8050

50 Ton (45.36 metric ton)

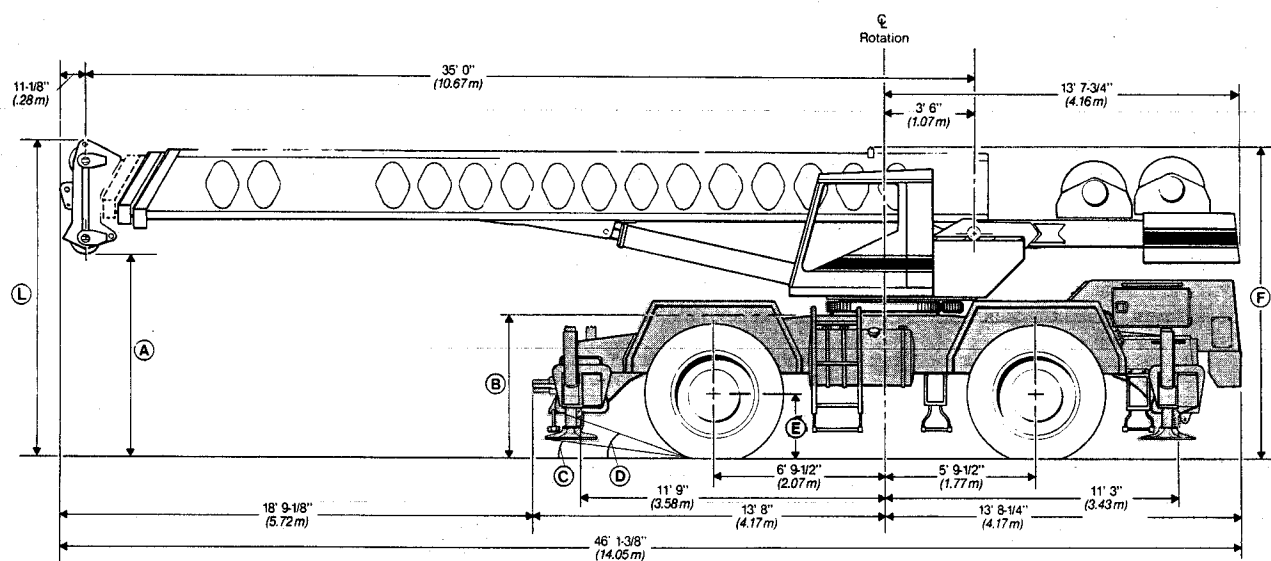

Not to Scale

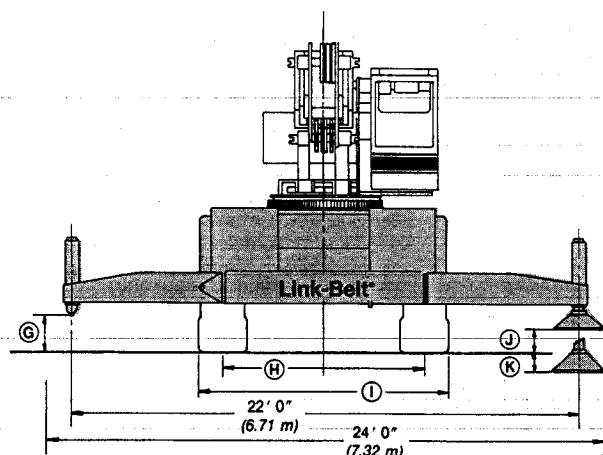

Not to Scale

General dimensions	feet	meters
Turning radius (4-wheel steer)	25'	7.62
Tailswing of counterweight	13' 8-5/8"	4.18

### Dimensions affected by tires

Tires	26.5 x 25 (24-PR)		29.5 x 25 (22-PR)	
	feet	meters	feet	meters
A	7' 9-1/4"	2.37	7' 10-3/4"	2.41
B	5' 9-1/2"	1.77	5' 11"	1.80
C	9"	—	10' 97"	—
D	22°	—	24' 5"	—
E	2' 6-3/8"	.77	2' 8"	.81
F	12' 2-1/2"	3.72	12' 4"	3.70
G	1' 7-3/4"	.50	1' 9-5/16"	0.54
H	8' 6-1/2"	2.60	8' 2-1/2"	2.50
I	10' 10"	3.30	10' 9-1/2"	3.28
J	9-3/4"	.25	11-5/16"	.29
K	10"	.25	7-9/32"	.18
L	12' 6-3/4"	3.83	12' 8-1/4"	3.80

# Upperstructure

## ■ Boom

**Patented design.** Boom side plates have diamond shaped impressions for superior strength to weight ratio and 100,000 psi (689.5 MPa) steel angle chord for lateral stiffness. Boom sections are supported by wear shoes both vertically and horizontally. Anti two block, electronic boom length / angle indicator and function kickout.

**Load Moment Indicator** — Audio-visual warning system with anti-two block and function kickouts. Constant display of boom length and angle, tip height, radius of load, machine configuration, allowed load, actual load and % of allowed load. Presettable alarms for maximum and minimum boom angles, maximum tip height and maximum boom length.

**Standard boom** — 35' 0"-85' 0" (10.67 m-25.91 m) 3-section full power boom.

**Optional boom** — 35' 0"-110' 0" (10.67 m-33.53 m) 4-section boom includes base section, two power sections, and manual fourth section. Fourth section is power pinned by manually activating a cylinder locking system.

**Boom head** — **Standard;** Four 16-3/8" (0.42 m) root diameter head sheaves with five 16-3/8" (0.42 m) available to handle up to 10 parts of wire rope. Two easily removable wire rope guards; rope dead end lugs provided on each side of boom head.

**Auxiliary lifting sheave** — *Optional;* Single 16-3/8" (0.42 m) root diameter head sheave with removable wire rope guard, mounted to boom, for use with one or two parts of line off the optional auxiliary winch. Does not affect erection of fly or jib, or use of main head sheave for multiple reeving.

**Boom elevation** — Two hydraulic cylinders with holding valves. Self aligning steel bushings. Hand and optional foot controls for controlling the boom elevation from -3° to 78°.

## ■ Fly

*Optional* — 33' 0" (10.06 m) stowable one-piece lattice piece.

## ■ Jib

*Optional* — 25' 0" (7.62 m) stowable A-frame which can be offset 5°, 17.5°, and 30°. Attaches to fly only.

## ■ Cab and Controls

Environmental cab; isolated from sound and vibration by a neoprene seal. All windows are tinted and tempered safety glass. Sliding rear and right side windows and swing up roof window for maximum visibility and ventilation. Slide-by-door opens to 3' 0" (0.91 m) width. 6-way adjustable operator's seat. 4-way adjustable tilt/telescoping steering wheel. Control levers for swing, boom telescope, winch and boom hoist with foot control swing brake. Outrigger controls, sight level bubble. Optional foot control for boom hoist.

### Cab instrumentation

Dash mounted gauges for hydraulic oil temperature, converter temperature, oil pressure, water temperature, fuel and voltmeter.

## ■ Swing

Bi-directional hydraulic swing motor mounted to a planetary reducer for 360° continuous smooth swing at 2.45 r.p.m.

**Swing brake** — **Standard;** foot operated, spring released disc brake mounted on the speed reducer.

**Swing lock** — **Standard;** 360° position pin type and a two position travel lock operated from the operator's cab.

### Counterweight

Pinned to upperstructure frame.

## ■ Hydraulic System

**Main pump** — Triple gear-type pump. Combined pump capacity 161 gpm (609.4 lpm). Powered by torque converter through a pump disconnect. Pump disconnect is a jaw-type clutch engaged/disengaged from carrier. Maximum system pressure at 2900 p.s.i. (199.94 Bars).

**Steering/outrigger pump** — Single gear-type pump, 28 gpm (106 lpm) maximum. Powered by torque converter through a straight mechanical drive. Pump operates at 2,700 p.s.i. (186.25 bars).

### Reservoir

140 gallon (530.0 L) capacity. Diffusers for deaeration.

**Filtration** — One six-micron filter located inside the hydraulic reservoir. Accessible for easy replacement.

**Control valves** — Six separate control valves allow simultaneous operation of all crane functions.

## ■ Load Hoist System

**Standard** — Model 2M main winch with two-speed motor and automatic brake; power up/power down mode of operation. Bi-directional gear type hydraulic motor.

*Optional* — Model 2M auxiliary winch with two-speed motor and automatic brake, power up/power down mode of operation. Bi-directional, gear-type hydraulic motor.

*Optional* — Model 3M winch with power up/power down, two-speed motor and exclusive controlled true gravity free fall. Available on main winch only.

**Line pulls and speeds** — Maximum line pull 15,870 lbs. (7 199 kg) and maximum line speed 548 f.p.m. (167.03 m/min.) on 17" (0.43 m) root diameter smooth drum.

## ■ Additional Equipment - Standard

Rear view mirrors, seat belt, fire extinguisher, backup alarm, travel lights and sound suppressed cab.

## ■ Additional Upperstructure Equipment - Optional

Propane heater, diesel heater, air conditioning, drum rotation indicators, 60-ton (54.43 metric ton) hook block, 8-1/2 ton (7.71 metric ton) hook ball and swivel, rear steer indicator, boom mounted working light, engine monitoring system, top hatch wiper, windshield washer, hand throttle, lifting lugs, tachometer, amber rotating beacon, cab spotlight and boomhoist foot control.

GENERAL INFORMATION ONLY

# Carrier

## Type

10' 10" (3.30 m) wide, 151" (3.84 m) wheelbase.

4 x 4 x 4 — (4-wheel steer, 4-wheel drive)  
**Standard**; for rough terrain with limited turning area.

4 x 4 x 4 — (4-wheel steer, 4-wheel drive)  
*Optional*; no spin differential on front axle; for rough terrain with limited turning area.

**Frame** - 100,000 p.s.i. (689.5 MPa) steel, double walled construction with integral 100,000 p.s.i. (689.5 MPa) steel outrigger boxes.

## Axles

**Front, Standard** — heavy duty planetary drive/steer type.

**Rear, Standard** — heavy duty planetary drive/steer type.

**Front, Optional** — heavy duty no-spin high traction differential, planetary drive/steer type.

## Suspension

**Front axle** - Rigid mounted to frame.

**Rear axle** - Pin-mounted on bronze bushings, automatic hydraulic rear axle oscillation lock-out cylinders engage when upperstructure rotates past 2-1/2° of centerline.

## Tires

**Front and rear**  
**Standard** — 26.5 x 25 (24-PR)  
 Earthmover type

*Optional* — 29.5 x 25 (22-PR)  
 Earthmover type

## Brakes

**Service** — Air over hydraulic, drum-type brakes at each wheel end. Drum diameter 20-1/4" (0.51 m). Shoe width 4" (101.6 mm).

**Parking/emergency** — Disc caliper type spring applied, air released, fade resistant; cab controlled, mounted on front axle.

## Steering

Hydraulic two wheel, four wheel and "crab" steering.

## Transmission

3-speed, 2-range power shift transmission. Six speeds available forward and 2 reverse. Front axle disconnect for two or four-wheel drive.

## Outriggers

Four hydraulic, beam and jack outriggers. Vertical jack cylinders equipped with integral holding valve. Beams extend to 22' 0" (6.71 m) centerline-to-centerline and retract to within 10' 10" (3.30 m) overall width with floats stored. Equipped with stowable, lightweight 24" (0.61 m) diameter floats. Controls and sight level bubble located in upperstructure cab.

## Additional Equipment - Standard

Cab steps, 2 front carrier steps, skid resistant finish on carrier deck, storage compartment and fenders.

## Additional Equipment - Optional

Towing shackles, ether injection, no-spin differential on front axle, spare tires and rims, pintle hook, jack cylinder hose covers, propane fired engine block heater, air dryer and emergency steering system.

## Travel Speeds and Gradeability

Engine	Tires	Maximum Speed		Gradeability at stall	Maximum tractive effort at stall		Gradeability at 1.0 mph (1.61 km/h)	Maximum tractive effort at 1.0 mph (1.61 km/h)	
		mph	km/h		pounds	kg		pounds	kg
<b>GM 6V-53N</b>	26.5 x 25	21	33.79	168%	79,145	35 900	55%	45,499	20 638
	*29.5 x 25	21	33.79	147%	76,177	34 554	52%	43,793	19 865
<b>Cummins 6CT 8.3*</b>	26.5 x 25	21	33.79	254%	85,551	38 806	62%	49,304	22 364
	*29.5 x 25	21	33.79	200%	82,343	37 351	59%	47,455	21 526

\* Optional Equipment

Engine	GM 6V-53N	Cummins 6CT 8.3*
Cylinders - cycle	6 - 2	6 - 4
Bore	3-7/16" (98.43 mm)	4.49" (114.05 mm)
Stroke	4-1/2" (114.30 mm)	5.32" (135.13 mm)
Displacement	318 cu. in. (5 211 cm <sup>3</sup> )	504 cu. in. (8 259 cm <sup>3</sup> )
Compression ratio	21:1	17.3:1
Maximum brake h.p.	205 at 2700 r.p.m.	215 at 2700 rpm
Idle speed	500 r.p.m.	600 r.p.m.
Peak torque	445 lbs.	567 ft. lbs. at 1500 rpm
Electrical system	12 volt negative ground	12 volt negative ground
Fuel capacity	100 gallons (378.5 L)	100 gallons (378.5 L)
Alternator	80 amp Delco	80 amp Delco
Crankcase capacity	18.4 quarts (17.41 L)	18.9 quarts (17.89 L)
Air compressor	12 c.f.m. (0.34 m <sup>3</sup> /min)	13.2 c.f.m. (0.37 m <sup>3</sup> /min)

\* Optional Equipment

GENERAL INFORMATION ONLY

## Axle Loads

Base machine with standard 35'-85' (10.67 m-25.91 m) 3-section boom, main winch with 2-speed hoisting and power up/down, 600' (182.88 m) 3/4" (19 mm) wire rope, 4 x 4 x 4 carrier with GM 6V-53N engine, 26.5 x 25 tires, full fuel, rear counterweight, 4-sheave head machinery.	GVW <sup>Ⓢ</sup>		Upper facing front				Upper facing rear			
			Front axle		Rear axle		Front axle		Rear axle	
	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg
	77,988	34 044	34,690	15 732	40,378	18 312	28,292	12 831	46,776	21 214
35'-110' (10.67 m-33.52 m) 4-section boom	1,952	885	1,808	820	-1,057	-479	-1,212	-550	3,164	1 435
33' (10.06 m) lattice fly stowed	1,040	472	1,660	753	-620	-281	-703	-319	1,743	790
25' (7.62 m) A-frame jib stowed	1,128	512	1,438	652	-310	-141	-402	-182	1,530	694
Hook block at bumper	1,070	485	1,730	785	-660	-293	—	—	—	—
Headache ball at bumper	325	147	525	238	-200	-91	—	—	—	—
Auxiliary lifting sheave	150	68	468	212	-318	-144	-330	-150	480	218
Fly and jib stowage brackets	230	104	343	156	-113	-51	-132	-60	362	164
29.5 x 25 tires	160	72	80	36	80	36	—	—	—	—

<sup>Ⓢ</sup> Adjust gross vehicle weight and axle loading according to components weight.

**Note:** All weights are  $\pm 3\%$ .

Tire	Max. Axle Load @ 20 mph (32.7 km/hr)
26.50 x 25 (24-PR)	44,200 lbs. (20 047 kg)
29.50 x 25 (22-PR)	49,500 lbs. (22 451 kg)

**GENERAL INFORMATION ONLY**

• Link-Belt is a registered trademark.

We are constantly improving our products and therefore reserve the right to change designs and specifications.

**Link-Belt Construction Equipment Company Lexington, Kentucky**

A unit of Sumitomo Construction Machinery Co., Ltd.

# Lifting Capacities




Link-Belt®

*Eighty Series* Hydraulic Rough Terrain Cranes

**HSP-8050 50-ton (45.36 metric ton)**

3-Section Boom

GENERAL INFORMATION

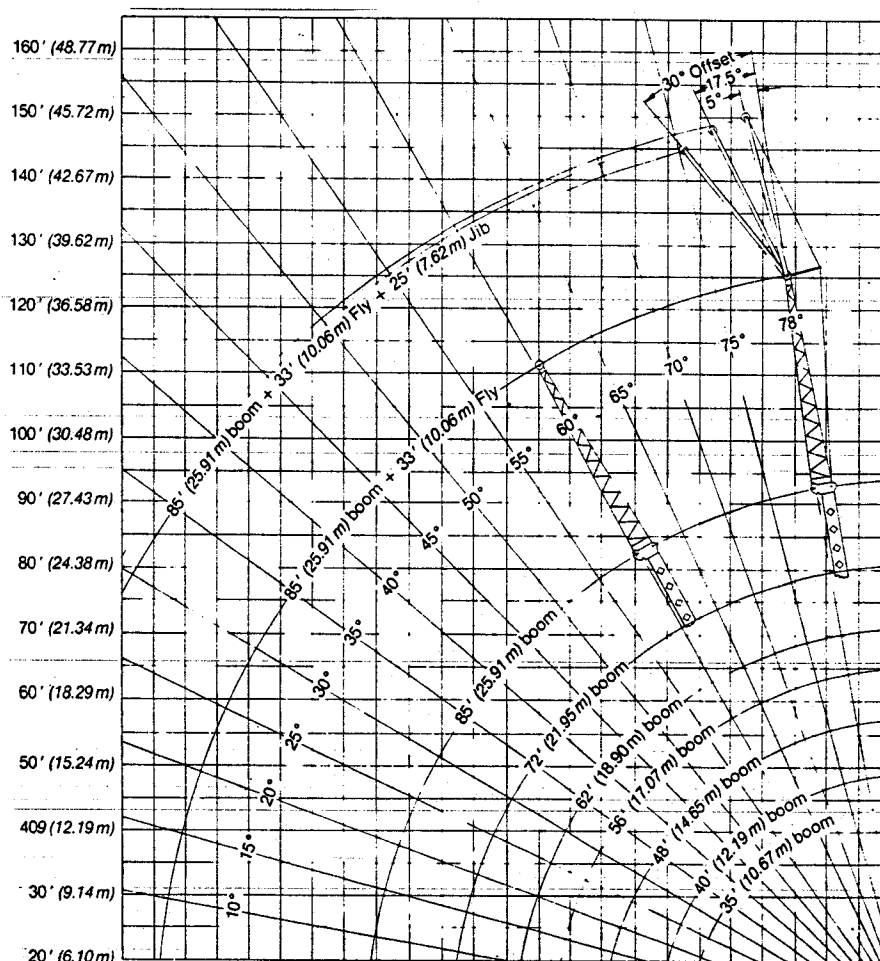

120'	110'	100'	90'	80'	70'	60'	50'	40'	30'	20'
(36.58 m)	(33.53 m)	(30.48 m)	(27.38 m)	(24.38 m)	(21.34 m)	(18.29 m)	(15.24 m)	(12.19 m)	(9.14 m)	(6.10 m)

Note: Boom and fly and jib geometry shown are for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook.

# HSP-8050 Lifting Capacities

Refer to Operating Instructions page 4

35'-85' (10.67-25.91 m) 3-section boom

Capacities On Outriggers①															85' (25.91 m) Boom With 33' (10.06 m) Fly		
Load radius	35' (10.67 m)		40' (12.19 m)		48' (14.63 m)		56' (17.07 m)		62' (18.90 m)		72' (21.95 m)		85' (25.91 m)		118' (35.96 m)②		
	360°	Front	360°	Front	360°	Front	360°	Front	360°	Front	360°	Front	360°	Front	Angle	360°	Front
10' 3.05m	100,000 45360	100,000 45360	72,100 32705	72,100 32705	70,500 31979	70,500 31979	69,700 31616	69,700 31616									
12' 3.66m	100,000 45360	100,000 45360	72,100 32705	72,100 32705	70,500 31979	70,500 31979	69,700 31616	69,700 31616	69,700 31616	69,700 31616							
15' 4.57m	86,500 39236	86,500 39236	72,100 32705	72,100 32705	70,500 31979	70,500 31979	69,700 31616	69,700 31616	65,500 29711	65,500 29711	59,900 27171	59,900 27171					
20' 6.10m	65,400 29665	65,400 29665	65,400 29665	65,400 29665	65,400 29665	65,400 29665	65,400 29665	65,400 29665	53,500 24268	53,500 24268	48,800 22136	48,800 22136	38,700 17554	38,700 17554			
25' 7.62m	50,800 23043	50,800 23043	50,800 23043	50,800 23043	50,800 23043	50,800 23043	50,800 23043	50,800 23043	44,900 20367	44,900 20367	41,100 18643	41,100 18643	34,600 15695	34,600 15695	77.0°	20,000 9072	20,000 9072
30' 9.14m			37,100 16829	41,300 18734	37,100 16829	41,300 18734	37,100 16829	41,300 18734	37,100 16829	38,600 17509	35,500 16103	35,500 16103	29,700 13472	29,700 13472	75.0°	19,000 8618	19,000 8618
35' 10.67m					28,200 12792	33,000 14969	28,200 12792	33,000 14969	28,200 12792	33,000 14969	28,200 12792	31,100 14107	25,500 11567	25,500 11567	72.0°	17,000 7711	17,000 7711
40' 12.19m					22,100 10025	26,000 11794	22,100 10025	26,000 11794	22,100 10025	26,000 11794	22,100 10025	26,000 11794	22,100 10025	22,200 10070	70.0°	15,400 6985	15,400 6985
45' 13.72m							18,000 8165	21,300 9662	18,000 8165	21,300 9662	18,000 8165	21,300 9662	18,000 8165	19,600 8891	67.0°	14,000 6350	14,000 6350
50' 15.24m							14,800 6713	17,600 7983	14,800 6713	17,600 7983	14,800 6713	17,600 7983	14,800 6713	17,400 7983	64.0°	13,000 5897	13,000 5897
55' 16.76m									12,500 5670	14,900 6759	12,500 5670	14,900 6759	12,500 5670	14,900 6759	62.0°	11,700 5307	11,700 5307
60' 18.29m											10,700 4854	12,900 5851	10,700 4854	12,900 5851	59.0°	10,700 4854	10,700 4854
65' 19.81m											9,100 4128	11,000 4990	9,100 4128	11,000 4990	56.0°	9,800 4445	9,800 4445
70' 21.34m													7,900 3583	9,700 4400	53.0°	9,000 4082	9,000 4082
80' 24.38m													5,800 2631	7,300 3311	46.0°	7,100 3221	7,700 3493
90' 27.43m															39.0°	5,500 2495	6,600 2994
100' 30.48m															30.0°	4,300 1950	5,500 2495
110' 33.53m															17.0°	3,300 1497	4,400 1996

① All capacities on outriggers are based on outriggers fully extended with boom sections extended equal distance.

② Capacities for boom plus fly can be extended or retracted, but are based on boom angle only. See Operating Instructions Number 15.

## Wire rope size and type

Wire rope application	Size and type used	Wire rope description
Main winch	3/4" (19 mm) diameter Type "N"	Type "N" - 6 x 25 (6 x 19 class) filler wire, extra
Auxiliary winch	3/4" (19 mm) diameter Type "N"	improved plow steel, preformed, independent wire rope core, right lay, regular lay

## Drum wire rope capacities

Wire rope layer	Main and auxiliary drum 17" (0.43 m) root diameter smooth and grooved lagging			
	3/4" (19 mm) wire rope			
	Rope per layer		Total wire rope	
	Feet	meters	Feet	meters
1	97	29.57	97	29.57
2	111	33.83	208	63.40
3	114	34.75	322	98.15
4	122	37.19	444	135.33
5	130	39.62	574	174.96
6	139	42.37	713	217.32
7	140	42.67	853	259.99

Footnotes:

① All capacities on outriggers are based on outriggers fully extended with boom sections extended equal distance.

② Calculating capacities for extended or retracted boom plus fly must be based on boom angle only for boom lengths other than those listed. See Operating Instructions Number 14.

③ See Operating Instructions: set-up Number 4.

GENERAL INFORMATION ONLY

## HSP-8050 Lifting Capacities

Refer to Operating Instructions page 4

35'-85' (10.67-25.91 m) 3-section boom

Capacities On Tires – 26.5 x 25-24 Ply									
Load Radius		Maximum Boom Length		Creep <sup>①</sup>		Stationary			
				Boom Centered Over Front		360°		Over Front	
Feet	Meters	Feet	Meters	Pounds	Kg	Pounds	Kg	Pounds	Kg
10'	3.05m	35'	10.67m	58,900	26,717	42,800	19,414	58,900	26,717
12'	3.66m	35'	10.67m	52,000	23,587	36,300	16,466	52,000	23,587
15'	4.57m	35'	10.67m	43,500	19,732	28,400	12,882	44,200	20,049
20'	6.10m	35'	10.67m	33,600	15,241	17,700	8,029	34,500	15,649
25'	7.62m	35'	10.67m	24,600	11,159	12,000	5,443	24,600	11,159
30'	9.14m	40'	12.19m	17,800	8,074	8,500	3,856	17,800	8,074
35'	10.67m	40'	12.19m	13,700	6,214	6,200	2,812	13,700	6,214
40'	12.19m	48'	14.63m	10,900	4,944	4,600	2,087	10,900	4,944
45'	13.72m	56'	17.07m	8,800	3,992	3,400	1,542	8,800	3,992
50'	15.24m	56'	17.07m	7,200	3,266	2,500	1,134	7,200	3,266
55'	16.74m	62'	18.90m	5,900	2,676	1,800	816	5,900	2,676
60'	18.29m	72'	21.95m	4,900	2,223	1,100	499	4,900	2,223
65'	19.81m	72'	21.95m	4,000	1,814			4,000	1,814
70'	21.34m	85'	25.91m	3,300	1,497			3,300	1,497

① See Operating Instruction; Set-Up Number 4

Jib Capacities			
33' (10.06 m) fly + 25' (7.62 m) jib			
Boom angle	Jib Offset		
	5	17.5	30
78	5,100 2,313	5,100 2,313	4,200 1,905
75	5,100 2,313	5,100 2,313	4,000 1,814
70	5,100 2,313	4,900 2,223	3,600 1,633
65	4,500 2,041	4,100 1,860	3,400 1,542
60	3,700 1,678	3,300 1,497	2,800 1,270
55	3,000 1,361	2,700 1,225	2,400 1,089
50	2,500 1,134	2,300 1,043	2,000 907

### Tire Inflation

Tires	Ply	Pressure
29.5 x 25	22	60 p.s.i. (2.14 Bars)
26.5 x 25	24	75 p.s.i. (5.17 Bars)

Hydraulic Circuit Pressure Settings		
Circuit	Function	Pressure
Main	Boom hoist	2,900 p.s.i. (200.0 Bars)
	Wire rope hoist	2,750 p.s.i. (189.66 Bars)
Secondary	Swing	1,500 p.s.i. (103.45 Bars) at port relief
	Inner-mid telescope	2,500 p.s.i. (172.41 Bars)
	Outer-mid telescope	2,700 p.s.i. (186.21 Bars)
	Outriggers	2,700 p.s.i. (186.21 Bars)
Charge Pump	Winch brake and clutch	1,500 p.s.i. (103.45 Bars)

Capacity Deductions for Auxiliary Load Handling Equipment	
Picking From Main Boom With	
Aux. Head	200 lb. (91 kg)
Jib Stowed	600 lb. (272 kg)
Fly Stowed	700 lb. (318 kg)
Fly Erected	1700 lb. (771 kg)
Fly & Jib Stowed	1300 lb. (590 kg)
Fly & Jib Erected	4300 lb. (1951 kg)
Picking From 33 Ft. (10.66 m) Fly With	
Jib Erected	2000 lb. (907 kg)
Jib Stowed	600 lb. (272 kg)

### Line Speeds and Pulls

Layer	Speed	Main or auxiliary winch -17" (0.43 m) drum			
		Line Speeds		Available Line Pulls	
		F.p.m.	m/min.	Lbs.	kgs.
First	Low	172	52.43	15,870	7,199
	High	364	110.95	7,520	3,411
Second	Low	187	57.00	14,630	6,636
	High	394	120.09	6,930	3,143
Third	Low	201	61.26	13,580	6,160
	High	425	129.54	6,430	2,917
Fourth	Low	216	65.84	12,660	5,743
	High	456	138.99	6,000	2,722
Fifth	Low	230	70.10	11,860	5,380
	High	487	148.44	5,620	2,549
Sixth	Low	245	74.68	11,160	5,062
	High	517	157.58	5,280	2,395
Seventh	Low	260	79.25	10,530	4,776
	High	548	167.03	4,990	2,264

GENERAL INFORMATION ONLY

### HSP-8050

## Warning and Operating Instructions

READ AND UNDERSTAND THESE OPERATING INSTRUCTIONS AND THE CHART VALUES BEFORE OPERATING CRANE. OPERATION WHICH DOES NOT FOLLOW THESE INSTRUCTIONS MAY RESULT IN AN ACCIDENT.

#### General:

1. Rated lifting capacities in pounds as shown on lift chart pertain to this machine as originally manufactured and normally equipped by FMC Corporation, Construction Equipment Group. Modifications to the machine or use of optional equipment other than that specified can result in a reduction of capacity.
2. Construction equipment can be dangerous if improperly operated or maintained. Operation and maintenance of this machine must be in compliance with the information in the operator's, parts and safety manuals supplied with this machine. If these manuals are missing, order replacements through the distributor.
3. The operator and other personnel associated with this machine shall fully acquaint themselves with the latest applicable American National Standards Institute (ANSI) Safety Standards for cranes.
4. The maximum allowable lifting capacities are based on machine standing level on firm supporting surface.

#### Set-Up:

1. The machine shall be leveled on a firm supporting surface. Depending on the nature of the supporting surface, it may be necessary to have structural supports under the outrigger floats or tires to spread the load to a larger bearing surface.
2. When making lifts on outriggers, outrigger beams must be fully extended with tires free of supporting surface.
3. Crane Capacities on tires depend on tire capacity, condition of tires, and tire pressure. On-tire picks require lifting from main boom head only on a smooth and level surface. Boom sections must be extended equally. Two conditions are available for pick and carry operations. The first condition is creep. Creep is motion for less than 200' (60.9 m) in a 30 minute period and not exceeding 1 m.p.h. (1.61 km/hr). The second condition is 1 m.p.h. (1.61 km/hr). This operation is restricted to 1 m.p.h. (1.61 km/hr) maximum speed. For each condition, creep and 1 m.p.h. (1.61 km/hr), the boom must be centered over rear with swinglock engaged and the load must be restrained from swinging. Lifts with manual extended, fly or fly-jib combination erected are prohibited on tires.
4. When making lifts on rubber, tires must be inflated to the recommended pressure.
5. Outriggers must be set before swinging boom to over side position as shown on working area diagram.
6. When installing or removing counterweight, use fully retracted boom only. Do not swing counterweight beyond a 25' (7.62 m) radius. Machine must be on outriggers during this operation.
7. For required parts of line, see wire rope strength plate.

#### Operation:


1. Rated lifting capacities at rated radius shall not be exceeded. Do not tip machine to determine allowable load. For concrete bucket operation, weight of bucket and load shall not exceed 80% of rated lifting capacity. For clamshell bucket operation, weight of bucket and bucket content is restricted to a maximum weight of 7,000 pounds (3175 kg) or 80% of rated lifting capacity which ever is less. For magnet operation weight of magnet and load is restricted to a maximum weight of 7,000 pounds (3175 kg) or 80% of rated lifting capacity which ever is less. For clamshell and magnet operation maximum boom length is restricted to 56 feet (17.07 m) and the boom angle is restricted to a minimum of 35°. Manual extended, fly or fly-jib combinations are prohibited for both clam and magnet operation.

2. The crane capacities shown on outriggers do not exceed 85% of the tipping loads and crane capacities shown on tires do not exceed 75% of the tipping loads as determined by SAE crane stability test code J-765a.
3. The crane capacities above the bold lines are based on structural strength or hydraulic limitations.
4. Rated lifting capacities include the weight of hook block, slings, bucket, magnet and auxiliary lifting devices. Their weights must be subtracted from the listed rated load to obtain the net load to be lifted. See also deductions for auxiliary head, fly and jib.
5. Rated lifting capacities are based on freely suspended loads. No attempt shall be made to move a load horizontally on the ground in any direction.
6. Rated lifting capacities are for lift crane service only.
7. Do not operate at radii or boom lengths where capacities are not listed. At these positions, the machine can overturn without any load on the hook.
8. The maximum loads which can be telescoped are not definable because of variation in loadings and crane maintenance, but it is permissible to attempt retraction and extension within the limits of the load rating chart.
9. When either boom length or radius or both are between values listed, the smallest load shown at either the next larger radius or boom length shall be used.
10. The user shall operate at reduced ratings to allow for adverse job conditions, such as: soft or uneven ground, out of level conditions, wind, side loads, pendulum action, jerking or sudden stopping of loads, hazardous conditions, experience of personnel, two machine lifts, traveling with loads, electrical wires, etc. Side load on boom, fly or jib is extremely dangerous.
11. When making lifts with auxiliary head machinery, the effective length of the boom increases by 2' (.61 m). Effective length of boom is length shown on boom length indicator plus 2' (.61 m).
12. Power sections must be extended equally.
13. The least stable rated working area on outriggers is over the side.
14. Rated lifting capacities are based on correct reeving. Deduction must be made for excessive reeving. Any reeving over minimum required (see wire rope strength plate) is considered excessive and must be accounted for. Use working range plate to estimate the extra feet of rope then deduct 1 lb. (.45 kg) for each foot of wire rope before attempting to lift a load.
15. For boom lengths with fly less than 118' (35.97 m) rated loads are determined by boom angle only in the column headed by 118' (35.97 m). For angles not shown, use the next lower boom angle to determine allowable capacity.
16. The 25' (7.62 m) jib capacities are based on main boom angle regardless of main boom length. For angles not shown use next lower boom angle to determine allowable capacity. Capacity values can be used to operate over rear or over side. Warning: Do not lower 25' (7.62 m) jib in working position below 50 degrees unless boom is fully retracted.
17. The 35' (10.67 m) boom length capacities are based on boom fully retracted. If not fully retracted, do not exceed ratings for the 40' (12.19 m) boom length.

#### Definitions:

1. Load Radius: Horizontal distance from a projection of the axis of rotation to the supporting surface before loading to the center of the vertical hoist line or tackle with load applied.
2. Loaded Boom Angle: The angle between the boom base section and the horizontal after lifting the load at the rated radius. The boom angle, before loading, should be greater to account for deflections. The loaded boom angle combined with the boom length gives only an approximation of the operating radius.
3. Working Area: Area measured in a circular arc about the center line of rotation as shown on the working area diagram.
4. Freely Suspended Load: Load hanging free with no direct external force applied except by the hoist line.
5. Side Load: Horizontal side force applied to the lifted load either on the ground or in the air.

## HSP-8050 Working Areas

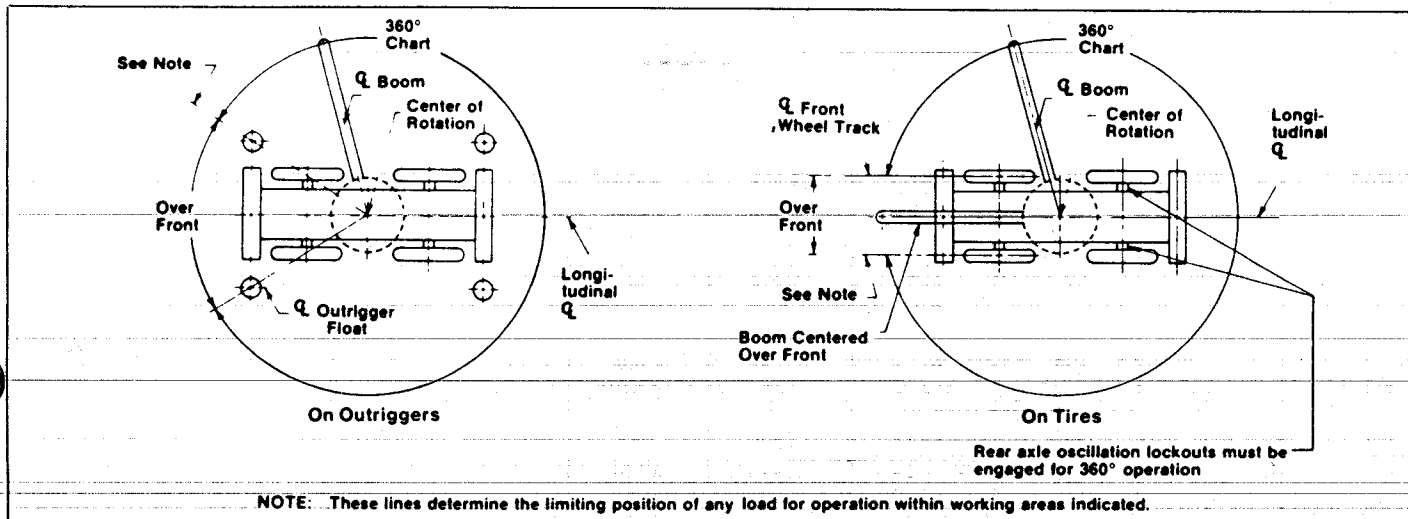

We are constantly improving our products and therefore reserve the right to change designs and specifications.



# Lifting Capacities




Link-Belt®

GENERAL INFORMATION ONLY

*Eighty Series* Hydraulic Rough Terrain Crane

**HSP-8050 50-ton (45.36 metric ton)**

4-Section Boom

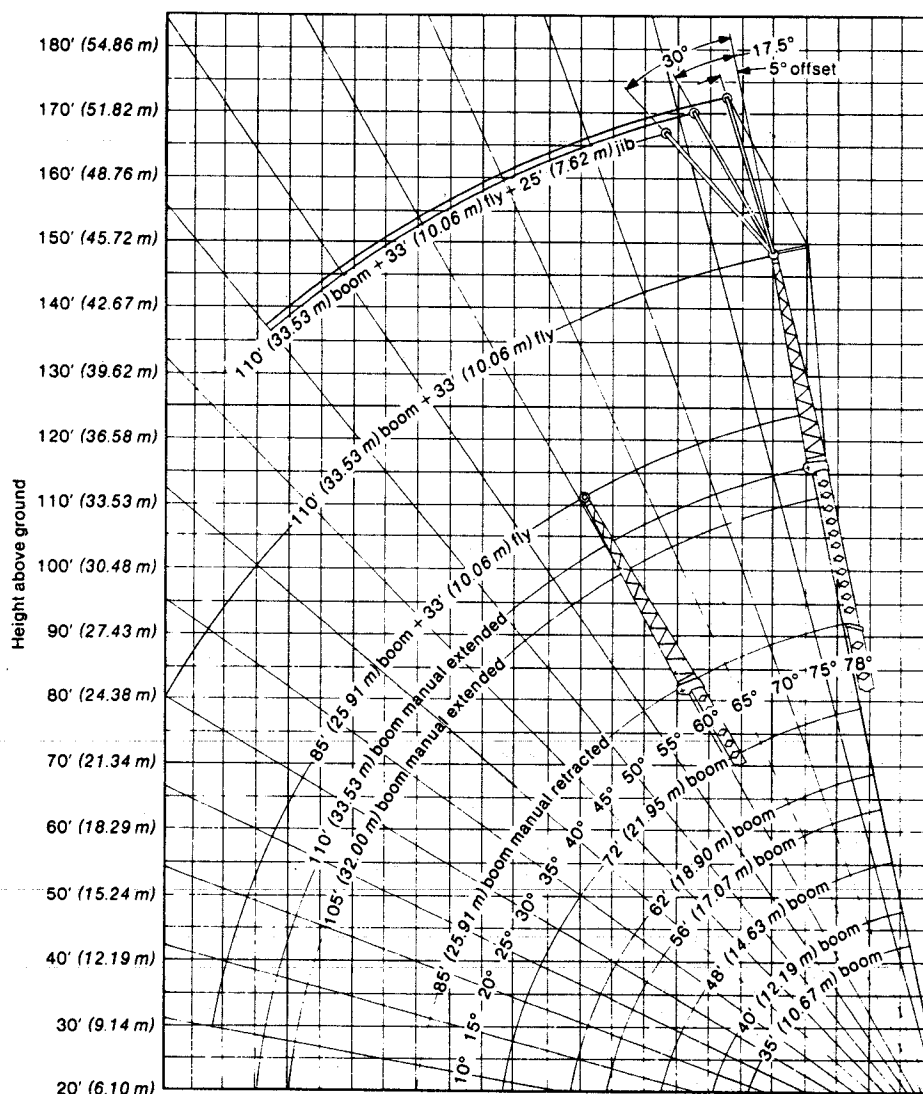

120	110	100	90	80	70	60	50	40	30	20
(36.58 m)	(33.53 m)	(30.48 m)	(27.43 m)	(24.38 m)	(21.34 m)	(18.29 m)	(15.24 m)	(12.19 m)	(9.14 m)	(6.10 m)

Operating Radius

**Note:** Boom and fly and jib geometry shown are for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and angle change must be accounted for when applying load to hook.

# HSP-8050 Lifting Capacities

Refer to Operating Instructions page 4

35'-110' (10.67-33.53 m) 4-section boom

Capacities On Outriggers① Manual Section Retracted														77' (23.47 m) boom plus 33' (10.06 m) fly			85' (25.91 m) boom plus 33' (10.06 m) fly			
Load radius	35' (10.67 m)		40' (12.19 m)		48' (14.63 m)		56' (17.07 m)		62' (18.90 m)		72' (21.95 m)		85' (25.91 m)		Boom angle	Front	360°	Boom angle	Front	360°
	Front	360°	Front	360°	Front	360°	Front	360°	Front	360°	Front	360°	Front	360°						
10' 3.05 m	100,000 45 360	100,000 45 360	72,100 32 705	72,100 32 705	70,800 32 115	70,800 32 115	68,100 30 890	68,100 30 890							See Note ②			See Note ②		
12' 3.66 m	98,300 44 589	98,300 44 589	72,100 32 705	72,100 32 705	70,800 32 115	70,800 32 115	68,100 30 890	68,100 30 890	67,600 30 663	67,600 30 663										
15' 4.57 m	84,000 38 102	84,000 38 102	71,500 32 432	71,500 32 432	70,800 32 114	70,800 32 114	68,100 30 890	68,100 30 890	59,400 26 944	59,400 26 944	51,800 23 496	51,800 23 496								
20' 6.10 m	64,300 29 166	64,300 29 166	64,300 29 166	64,300 29 166	64,300 29 166	64,300 29 166	57,200 25 946	57,200 25 946	48,900 22 180	48,900 22 180	43,200 19 596	43,200 19 596	36,600 16 602	36,600 16 602						
25' 7.62 m	49,800 22 589	49,800 22 589	49,800 22 589	49,800 22 589	49,800 22 589	49,800 22 589	48,100 21 818	48,100 21 818	41,300 18 734	41,300 18 734	36,800 16 692	36,800 16 692	30,500 13 835	30,500 13 835	76° 10 070	22,200 10 070	22,200 10 070	77° 8 392	18,500 8 392	18,500 8 392
30' 9.14 m			40,300 18 279	36,800 16 692	40,300 18 279	36,800 16 692	40,300 18 279	36,800 16 692	35,500 16 103	35,500 16 103	31,800 14 424	31,800 14 424	25,800 11 703	25,800 11 703	74° 10 070	22,200 10 070	22,200 10 070	75° 7 938	17,500 7 938	17,500 7 938
35' 10.67 m					32,400 14 696	27,500 12 474	32,400 14 696	27,500 12 474	32,400 14 696	27,500 12 474	27,800 12 602	27,500 12 474	22,200 10 069	22,200 10 069	71° 10 070	20,200 10 070	20,000 10 070	72° 7 031	15,500 7 031	15,500 7 031
40' 12.19 m					25,200 11 430	21,300 9 661	25,300 11 476	21,300 9 661	25,400 11 521	21,300 9 661	24,500 11 113	21,300 9 661	19,400 8 800	19,400 8 800	68° 8 573	18,900 8 573	18,900 8 573	70° 6 305	13,900 6 305	13,900 6 305
45' 13.72 m							20,400 9 253	17,100 7 757	20,400 9 253	17,100 7 757	20,400 9 253	17,100 7 757	17,100 7 757	17,100 7 757	66° 7 847	17,300 7 847	17,300 7 847	67° 5 625	12,400 5 625	12,400 5 625
50' 15.24 m							16,800 7 529	13,900 6 305	16,800 7 529	13,900 6 305	16,800 7 529	13,900 6 305	15,400 6 985	13,900 6 305	63° 6 985	15,400 6 985	15,400 6 985	64° 4 944	10,900 4 944	10,900 4 944
55' 16.76 m									13,900 6 305	11,500 5 216	13,900 6 305	11,500 5 216	13,800 6 260	11,500 5 216	60° 6 486	14,300 6 486	13,600 6 214	62° 4 355	9,600 4 355	9,600 4 355
60' 18.29 m											11,700 5 307	9,800 4 354	11,700 5 307	9,600 4 354	56° 5 397	13,200 5 988	11,600 5 261	59° 3 901	8,600 3 901	8,600 3 901
65' 19.81 m											9,900 4 490	7,900 3 583	9,900 4 490	7,900 3 583	53° 5 397	11,900 5 397	9,900 4 490	56° 3 493	7,700 3 493	7,700 3 493
70' 21.34 m													8,400 3 810	6,700 3 039	50° 4 717	10,400 4 717	8,600 3 901	53° 3 130	6,900 3 130	6,900 3 130
80' 24.38 m													6,000 2 721	4,500 2 041	42° 3 628	8,000 2 948	6,500 2 948	46° 2 540	5,600 2 540	5,600 2 540
90' 27.43 m															33° 2 812	6,200 2 044	4,900 2 044	39° 2 087	4,600 1 996	4,400 1 996
100' 30.48 m															21° 2 086	4,600 1 542	3,400 1 542	30° 1 769	3,400 1 542	3,400 1 542
110' 33.53 m																		17° 1 542	3,400 1 133	2,500 1 133

Wire rope application	Size and type used	Wire rope description
Main winch	3/4" (19 mm) diameter, Type "N"	Type "N" - 6 x 25 (6 x 19 class) filler wire, extra improved plow steel, preformed, independent wire rope core, right lay, regular lay.
Auxiliary winch	3/4" (19 mm) diameter, Type "N"	

## Drum wire rope capacities

Wire rope layer	Main and auxiliary drum 17" (0.43 m) root diameter smooth and grooved lagging			
	3/4" (19 mm) wire rope			
	Rope per layer		Total wire rope	
	Feet	meters	Feet	meters
1	97	29.57	97	29.57
2	111	33.83	208	63.40
3	114	34.75	322	98.15
4	122	37.19	444	135.33
5	130	39.62	574	174.96
6	139	42.37	713	217.32
7	140	42.67	853	259.99

### Footnotes

- ① All capacities on outriggers are based on outriggers fully extended with boom sections extended equal distance.
- ② Calculating capacities for extended or retracted boom plus fly must be based on boom angle only for boom lengths other than those listed. See Operating Instructions Number 14
- ③ See Operating Instructions, set-up Number 4.

## Capacities On Tires

Load Radius	Max. boom length	Pick & Carry③	Stationary	
		Over Front	360°	Over Front
10' 3.05 m	35' 10.67 m	58,000 26 309	42,100 19 097	57,300 25 991
12' 3.66 m	35' 10.67 m	50,600 22 952	33,700 15 286	50,500 22 907
15' 4.57 m	35' 10.67 m	42,100 19 097	23,100 10 478	42,700 19 369
20' 6.10 m	35' 10.67 m	32,200 14 606	14,000 6 350	32,700 14 833
25' 7.62 m	35' 10.67 m	22,400 10 160	9,100 4 127	22,600 10 251
30' 9.14 m	40' 12.19 m	15,900 7 212	6,000 2 721	15,900 7 212
35' 10.67 m	40' 12.19 m	11,900 5 398	3,800 1 723	11,900 5 398
40' 12.19 m	48' 14.63 m	9,100 4 127	—	9,100 4 127
45' 13.72 m	56' 17.07 m	7,000 3 175	—	7,000 3 175
50' 15.24 m	56' 17.07 m	5,400 2 449	—	5,400 2 449
55' 16.76 m	62' 18.90 m	4,200 1 904	—	4,200 1 904
60' 18.29 m	72' 21.95 m	3,200 1 451	—	3,200 1 451

## HSP-8050 Lifting Capacities

35'-110' (10.67-33.53 m) 4-section boom

Refer to Operating Instructions page 4

Capacities <sup>①</sup> On Outriggers Manual Section Extended									
Load radius	105' (32.00 m)			110' (33.53 m)			110' (33.53 m) boom plus 33' (10.06 m) fly		
	Boom angle	Front	360°	Boom angle	Front	360°	Boom angle	Front	360°
	See Note ②			See Note ②			See Note ③		
25' 7.62 m	76°	20,200 9 163	20,200 9 163	77°	19,000 8 618	19,000 9 027			
30' 9.14 m	73°	20,200 9 163	20,200 9 163	74°	18,500 8 392	18,500 8 392			
35' 10.67 m	71°	20,200 9 163	20,200 9 163	72°	17,600 8 121	17,600 8 121	76°	9,400 4 264	9,400 4 264
40' 12.19 m	68°	18,200 8 256	18,200 8 256	69°	15,500 7 030	15,500 7 030	74°	9,400 4 264	9,400 4 264
45' 13.72 m	65°	16,400 7 439	16,400 7 439	66°	13,700 6 214	13,700 6 214	72°	9,000 4 082	9,000 4 082
50' 15.24 m	62°	15,000 6 804	15,000 6 804	63°	12,100 5 488	12,100 5 488	70°	8,400 3 810	8,400 3 810
55' 16.76 m	59°	13,800 6 260	13,100 5 942	60°	10,700 4 853	10,700 4 853	68°	8,000 3 629	8,000 3 629
60' 18.29 m	55°	12,700 5 760	11,100 5 034	57°	9,700 4 400	9,700 4 400	66°	7,300 3 311	7,300 3 311
65' 19.81 m	52°	11,500 5 216	9,500 4 308	54°	8,700 3 946	8,700 3 946	64°	6,500 2 948	6,500 2 948
70' 21.34 m	48°	9,900 4 490	8,200 3 719	50°	7,800 3 357	7,800 3 357	61°	5,700 2 586	5,700 2 586
80' 24.38 m	39°	7,500 3 401	6,100 2 767	43°	6,400 2 903	6,000 2 721	56°	4,600 2 087	4,600 2 087
90' 27.43 m	29°	5,800 2 631	4,500 2 040	34°	5,500 2 495	4,400 1 995	51°	3,600 1 633	3,600 1 633
100' 30.48 m	12°	4,400 1 996	3,200 1 451	22°	4,300 1 950	3,200 1 451	46°	2,800 1 270	2,800 1 270
110' 33.53 m							39°	2,100 953	2,100 953
120' 36.58 m							32°	1,500 680	1,500 680

- ① All capacities on outriggers are based on outriggers fully extended with boom sections extended equal distance.  
 ② Calculating capacities for extended or retracted boom with manual section extended must be based on boom angle only. See Operating Instructions Number 13.  
 ③ Calculating capacities for extended or retracted boom with manual section extended plus fly must be based on boom angle only. See Operating Instructions Number 15.

Jib Capacities			
33' (8.84 m) fly plus 25' (7.62 m) jib			
Boom angle	Jib Offset		
	5°	17.5°	30°
78°	5,100 2 313	5,100 2 313	4,200 1 905
75°	5,100 2 313	5,100 2 313	4,000 1 814
70°	5,100 2 313	4,900 2 223	3,600 1 633
65°	4,500 2 041	4,100 1 860	3,400 1 542
60°	3,700 1 678	3,300 1 497	2,800 1 270
55°	3,000 1 361	2,700 1 225	2,400 1 089
50°	2,500 1 134	2,300 1 043	2,000 907

HSP-8050 hydraulic circuit pressure settings		
Circuit	Function	Pressure
Main	Boom hoist	2,900 p.s.i. (200.0 Bars)
	Wire rope hoist	2,750 p.s.i. (189.66 Bars)
Secondary	Swing	1,500 p.s.i. (103.45 Bars) at port relief
	Innertid telescope Steering	2,500 p.s.i. (172.41 Bars)
	Outertid telescope	2,700 p.s.i. (186.21 Bars)
	Outriggers	2,700 p.s.i. (186.21 Bars)
Charge Pump	Winch brake and clutch	1,500 p.s.i. (103.45 Bars)

## Line Speeds and Pulls

Layer	Speed	Main or auxiliary winch -17" (0.43 m) drum			
		Line Speeds		Available Line Pulls	
		F.p.m.	m/min.	Lbs.	kgs.
First	Low	172	52.43	15,870	7 199
	High	364	110.95	7,520	3 411
Second	Low	187	57.00	14,630	6 636
	High	394	120.09	6,930	3 143
Third	Low	201	61.26	13,580	6 160
	High	425	129.54	6,430	2 917
Fourth	Low	216	65.84	12,660	5 743
	High	456	138.99	6,000	2 722
Fifth	Low	230	70.10	11,860	5 380
	High	487	148.44	5,620	2 549
Sixth	Low	245	74.68	11,160	5 062
	High	517	157.58	5,280	2 395
Seventh	Low	260	79.25	10,530	4 776
	High	548	167.03	4,990	2 264

## Tire Inflation

Tires	Ply	Pressure
26.5 x 25	24	75 p.s.i. (5.17 Bars)
29.5 x 25	22	60 p.s.i. (2.14 Bars)

GENERAL INFORMATION ONLY

### General:

- Rated lifting capacities in pounds as shown on lift chart pertain to this machine as originally manufactured and normally equipped by FMC Corporation, Construction Equipment Group. Modifications to the machine or use of optional equipment other than that specified can result in a reduction of capacity.
- Construction equipment can be dangerous if improperly operated or maintained. Operation and maintenance of this machine must be in compliance with the information in the operator's parts and safety manuals supplied with this machine. If these manuals are missing, order replacements through the distributor.
- The operator and other personnel associated with this machine shall fully acquaint themselves with the latest applicable American National Standards Institute (ANSI) Safety Standards for cranes.
- All capacities are in pounds with metric equivalent in italic.

### Set-Up:

- Capacities included in this chart are the maximum allowable crane capacities and are based on the machine standing level on firm supporting surface under ideal job conditions. Depending on the nature of the supporting surface, it may be necessary to have structural supports under the outrigger floats or tires to spread the load to a larger bearing surface.
- When making lifts on outriggers, outrigger beams must be fully extended with tires free of supporting surface.
- Eight parts of  $\frac{3}{4}$ " (19 mm) diameter Type "N" wire rope required to lift maximum 100,000 lbs. (45 360 kg) rated load.
- Crane Capacities on tires depend on tire capacity, condition of tires, and tire pressure. On-tire picks require lifting from main boom head only on a smooth and level surface. Pick and carry operations (creep), are restricted to 1.0 m.p.h. (1.61 km/h) with the boom centered over front, the travel swing lock engaged and the load restrained from swinging. Lifts with the manual extended, fly or fly/jib combination erected are prohibited.
- When making lifts on rubber, tires must be inflated to the recommended pressure and power sections must be equally extended.

### Operation:

- Rated lifting capacities at rated radius shall not be exceeded. Do not tip the machine to determine allowable loads. For clamshell and concrete bucket operation, weight of bucket and load shall not exceed 80% of rated lifting capacities. Clamshell bucket weight including bucket content is restricted to a maximum of 7,000 pounds (3175 kg) with a maximum boom length of 56 feet (17.07 m) and a minimum boom angle of 35°. Manual extended, fly or fly/jib combinations are prohibited for clam work.
- The crane capacities shown on outriggers do not exceed 85% of the tipping loads and crane capacities shown on tires do not exceed 75% of the tipping loads as determined by SAE crane stability test code J-765a. Those capacities above the heavy bold line indicate capacities based on factors other than those which would cause a tipping condition.

- Do not operate at boom lengths or beyond radii where no capacities are shown. Machine may overturn without any load on the hook.
- To determine capacities in-between those shown on charts, refer to the rated lifting capacity of the next longer and next shorter booms for the same radius. The lesser of the two capacities will apply.
- When making lifts at a load radius not shown on charts, use the next longer radius to determine allowable capacity.
- Crane capacities are based on freely suspended loads and make no allowance for such factors as the effect of wind, sudden stopping of loads, supporting surface conditions, inflation of tires, and operating speeds. Operator must reduce load ratings to take such conditions into account. Deductions from rated capacities must be made for weight of hook block, weighted ball/hook, sling, spreader bar, fly or other suspended gear.
- Rated lifting capacities are based on correct reeving. Deduction must be made for excessive reeving. Any reeving over minimum required is considered excessive and must be taken into account. Use working range plate to estimate the extra feet of rope and then deduct 1 lb. (.4536 kg) for each foot of wire rope before attempting to lift a load.
- The following deductions from rated main boom capacities must be made if the machine is equipped with the following:
  - auxiliary lifting sheave - 200 lbs. (91 kg.)
  - 33' (10.06 m) one-piece fly stowed on boom - 700 lbs. (318 kg.)
  - 33' (10.06 m) one-piece fly in working position - 1,800 lbs. (816 kg.)
  - 33' (10.06 m) fly plus 25' (7.62 m) jib stowed on boom - 1,100 lbs. (499 kg.)
  - 33' (10.06 m) fly plus 25' (7.62 m) jib in working position - 4,400 lbs. (1 996 kg.)
  - 25' (7.62 m) jib in working position and picking from fly tip - 1,900 lbs. (862 kg.)
- Powered boom length is from 35' (10.67 m) to 85' (25.91 m).
- Extension or retraction of the boom with loads within the limits of the applicable rating chart may be attempted. The ability to telescope loads is limited by hydraulic pressure, boom angle, boom length, boom lubrication, etc.
- Do not move load to radii or boom lengths greater than those specified on applicable chart.
- Effective length of boom with auxiliary lifting sheave is length shown on boom length indicator plus 2' (0.61 m).
- The rated loads for the manual extended are determined by boom angle only for boom lengths other than 105' (32.00 m) and 110' (33.53 m) as follows: For boom lengths less than 105' (32.00 m), the rated loads are determined by boom angle only in the column headed 105' (32.00 m). For boom lengths between 105' (32.00 m) and 110' (33.53 m), the rated loads are determined by boom angle only in the column headed 110' (33.53 m) manual extended. For angles not shown, use next lower boom angle to determine allowable capacity.

- The rated loads for the manual retracted with 33' (10.06 m) fly are determined by boom angle only for boom lengths other than 110' (33.53 m) and 118' (35.97 m) as follows: For boom lengths with fly and manual retracted less than 110' (33.53 m), the rated loads are determined by boom angle only in the column headed 110' (33.53 m) manual retracted with fly. For boom lengths with fly and manual retracted between 110' (33.53 m) and 118' (35.97 m), the rated loads are determined by boom angle only in the column headed 118' (35.97 m). For angles not shown, use the next lower boom angle to determine allowable capacity.
- For boom lengths with fly less than 143' (44 m) with manual extended, the rated loads are determined by boom angle only in the column headed 143' (44 m). For angles not shown, use the next lower boom angle to determine allowable capacity.
- The 25' (7.6 m) jib capacities are based on main boom angle, regardless of main boom length. For angles not shown, use next lower boom angle to determine allowable capacity. Capacity values are for 360 degree operation. Warning: Do not lower 25' (7.6 m) jib in working position below 50 degrees unless boom is fully retracted.
- The 35' (10.67 m) boom length capacities are based on boom fully retracted. If not fully retracted, do not exceed ratings for the 40' (12.19 m) boom length.

### Definitions:

- Load Radius: Horizontal distance from a projection of the axis of rotation to the supporting surface before loading to the center of the vertical hoist line or tackle with load applied.
- Loaded Boom Angle: The angle between the boom base section and the horizontal after lifting the load at the rated radius. The boom angle, before loading, should be greater to account for deflections.
- Working Area: Area measured in a circular arc about the center line of rotation as shown on the working area diagram.
- Freely Suspended Load: Load hanging free with no direct external force applied except by the hoist line.
- Side Load: Horizontal side force applied to the lifted load either on the ground or in the air.

GENERAL INFORMATION ONLY

## Working Areas

## HSP-8050

