


## Dewatering Screens

TPH offers a variety of durable, high quality, heavy duty dewatering screens manufactured in-house under strict quality control guidelines. Reducing the moisture of your washed sand products will improve your Sand Equivalent value (ASTM D2419-14) and significantly reduce moisture. Typically our dewatering screens reduce moisture in concrete sands to less than 10%.

Other features include:

- Up to 300 ton per hour capacity
- Stressed relieved bridges
- Polydeck® screen media
- Huck® bolted
- Galvanized coating available

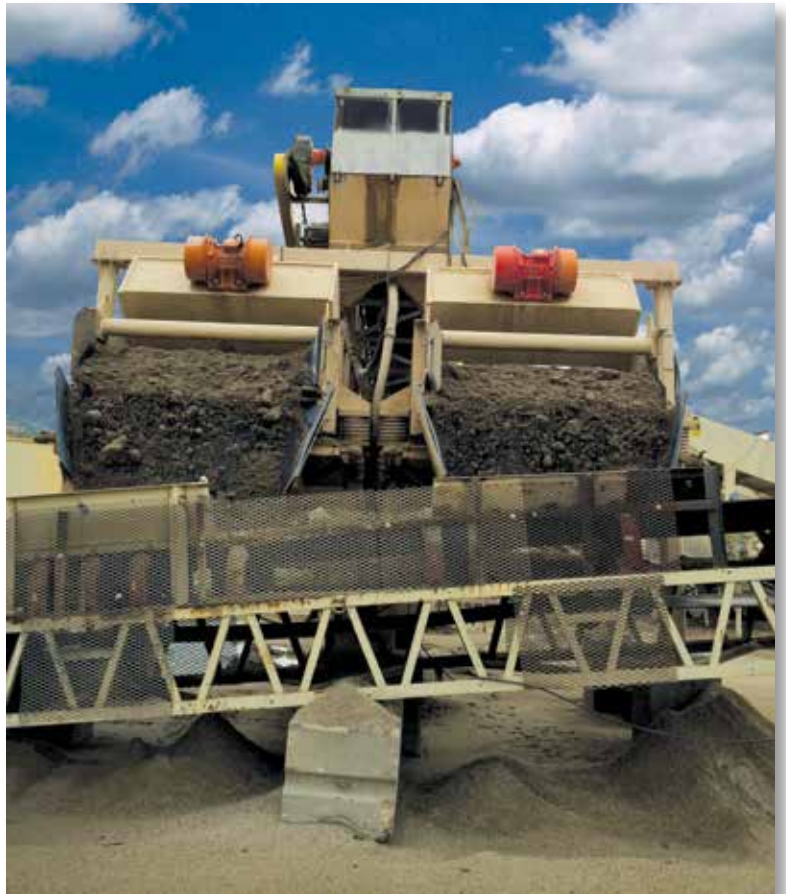

### Typical Screen Sizes:

SCREEN SIZE (FEET/METERS)	AREA (ft <sup>2</sup> , m <sup>2</sup> )
3x10 / 0.9x3	30 / 2.8
3x12 / 0.9x3.7	36 / 3.3
5x10 / 1.5x3	50 / 4.6
6x12 / 1.8x3.7	72 / 6.7
7x12 / 2.1x3.7	84 / 7.8
8x12 / 2.4x3.7	96 / 8.9

\*other sizes by request

